



BIS APPROVED DRIVER

HYBEC[®]
lighting the future



**SPARING,
SUBTLE & SMART...
YET
ECONOMICAL.**

ECO-BRITE
Series

LED LIGHTS FOR EVERY HOME

ECO-BRITE
Series
LED LIGHTS FOR EVERY HOME

by:




ECO-BRITE
LED LIGHTS FOR EVERY HOME



LED LIGHTS FOR EVERY HOME

Dealer Network

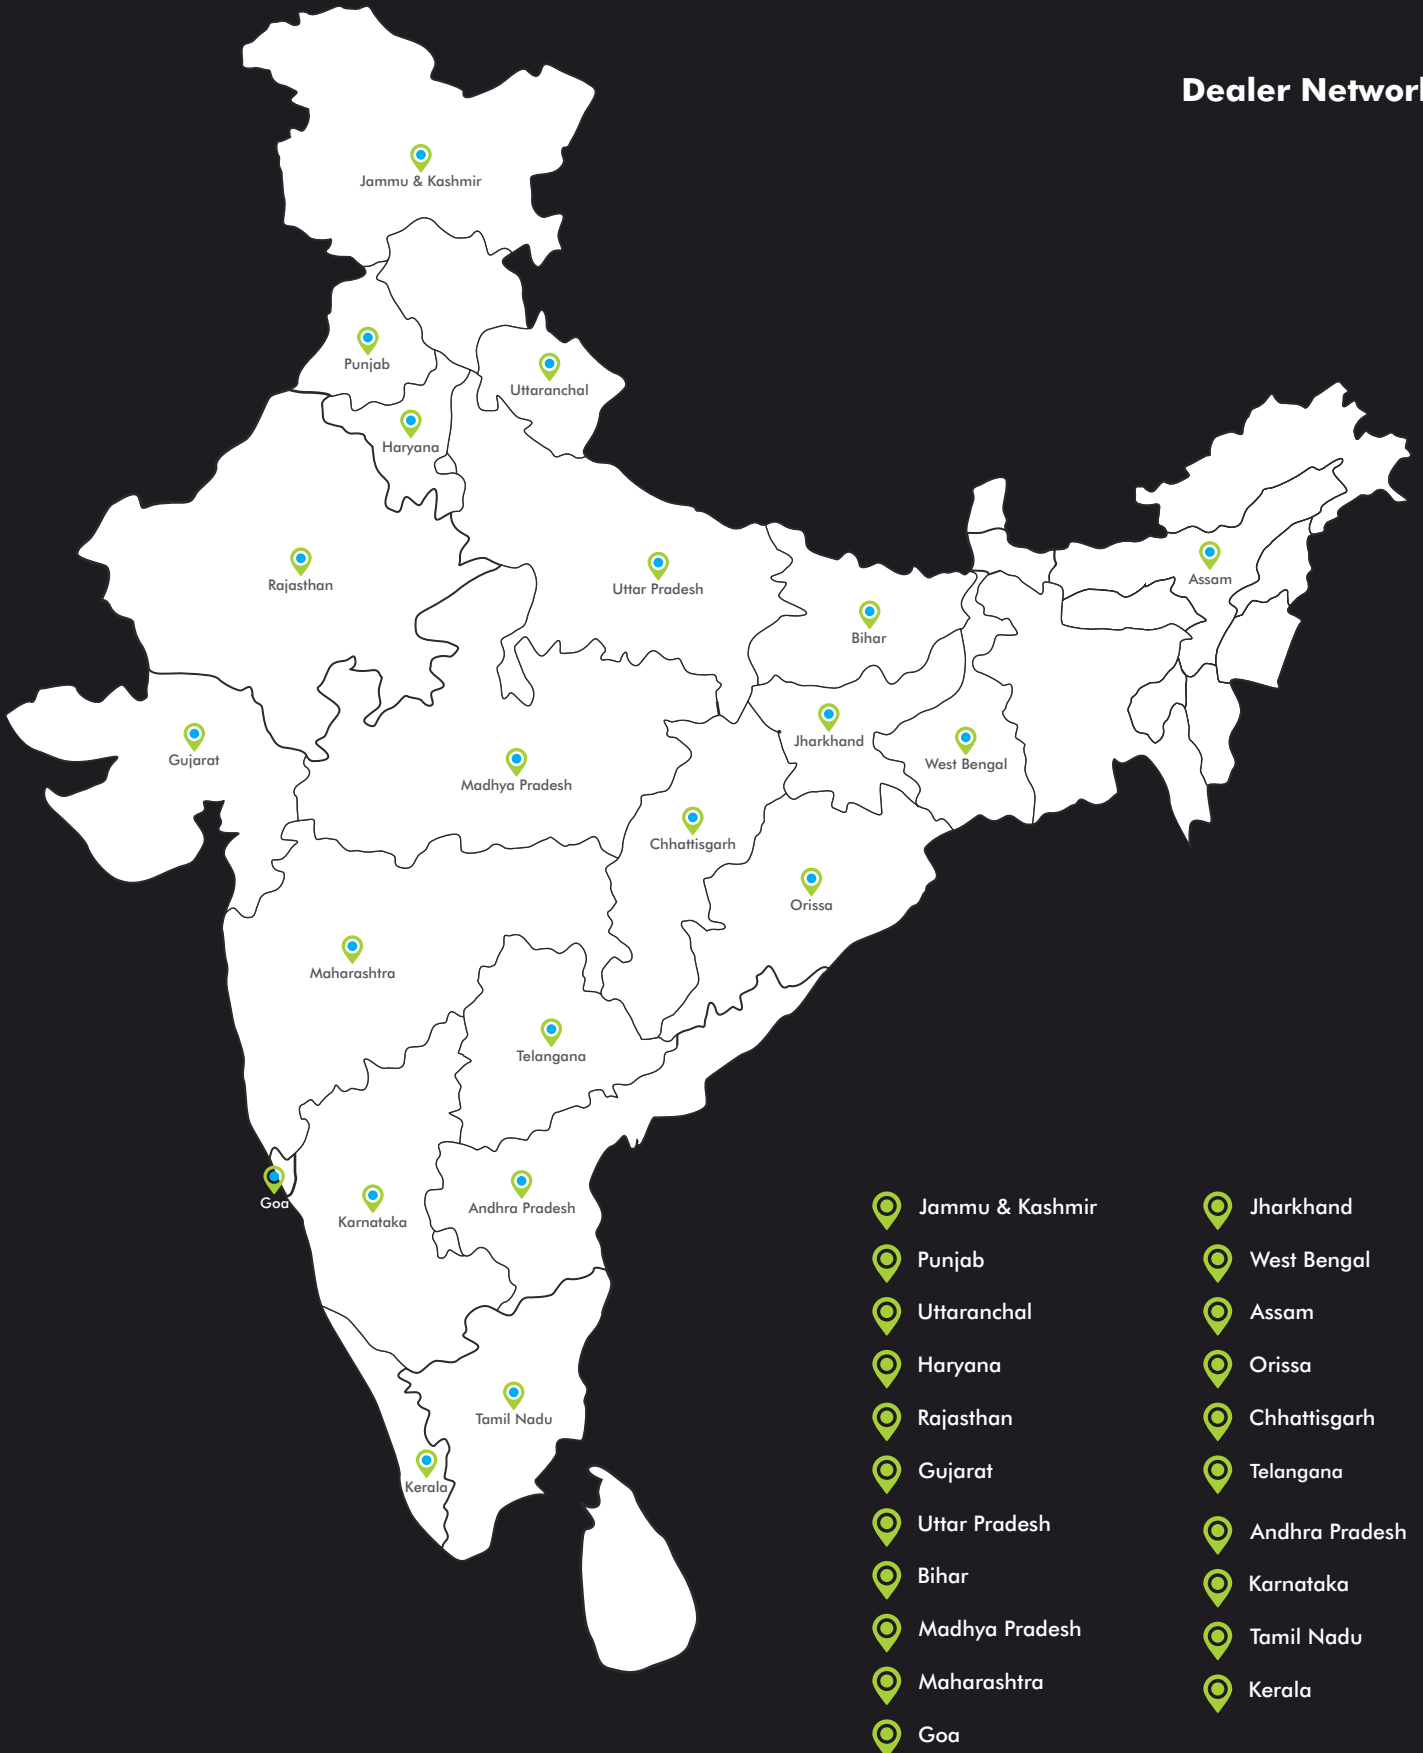



INDEX	PAGE NO.
LED RECESSED DOWNLIGHT - COB SPOT LIGHT SERIES	01-18
RETROFIT LAMP - GU10	19
LED MODULE LIGHT	19
LED DOWNLIGHT - PLASTIC BODY	20
LED STEP LIGHT	20
LED TRACK LIGHT	21
LED COB SURFACE SPOT LIGHT SERIES	22-26
LED CABINET LIGHT - IRIS SERIES	27-28
LED RECESSED DOWNLIGHT - COMET SERIES	29-30
LED TRIM-LESS PANEL LIGHT - TONE SERIES	31-32
LED SLIM RECESSED PANEL LIGHT - SONIC SERIES	33-34
LED RECESSED PANEL LIGHT - VISON SERIES	35-36
LED MULTIPURPOSE PANEL LIGHT SERIES - 600x600mm	37-38
LED RECESSED DOWN LIGHT - VELO SERIES	39-40
LED RECESSED DOWN LIGHT - XILO SERIES	41-42
LED ULTRA SLIM RIM PANEL LIGHT - LOCUS SERIES	43-44
LED SURFACE CUM PANEL LIGHT - DOMO SERIES	45-46
LED SURFACE CEILING LIGHT - DIRO SERIES	47-48
LED TRIM-LESS SURFACE CEILING LIGHT - DOMET SERIES	49-50
LED LINEAR PROFILE LIGHT SERIES	51 -58
LED UFO LED DOWNLIGHT - SMD	59
LED DETACHABLE LIGHT SERIES	60
ECO LED BULB SERIES - HIGH WATTS	61
ECO LED BULB - T SHAPE	62
ECO LED CANDLE LAMP	62
ECO LED LAMP - G9 LAMP NON DIMMABLE FLICKER FREE WITH IC	63
LED 0.5W BULB SERIES	64
LED LINKABLE TUBELIGHT SERIES	65
LED SLIM TUBELIGHT - T5 SLIM BATTEN LIGHT SERIES	66
LED SLIM TUBELIGHT - T5 COLOUR CHANGING SLIM BATTEN LIGHT	66
LED SLIM TUBELIGHT - T5 BATTEN LIGHT SERIES ALUMINIUM BODY	67
LED BATTEN LIGHT ANTI-GLARE SERIES	68
LED HANGING BATTEN LIGHT	68
LED RETROFIT TUBELIGHT - T8	69
LED MIRROR LIGHT - ALUMINIUM + PC BODY	69
LED MIRROR LIGHT - COLOUR CHANGING ALUMINIUM + PC BODY	70
LED FLEXI STRIP LIGHT - NON WATER PROOF - IP20	71
LED FLEXI STRIP LIGHT - WATER PROOF - IP65 & IP67	72
LED STRIP LIGHT - (220-240V) IP65	73
LED NEON FLEX STRIP LIGHT - (DOT FREE - 24V) IP65	73
LED SMPS DRIVER SERIES	74
LED FLOOD LIGHT - OUTDOOR IP65	75-78
LED STREET LIGHT - OUTDOOR IP65	79-80
LED HIGH-BAY LIGHT - OUTDOOR IP65	81-82
LED SPIKE LIGHT - OUTDOOR IP65	83-84



LED RECESSED DOWNLIGHT SERIES - SMD
JUNCTION BOX FITTING

Model No.: EB-9311
LED POWER : 7W
Housing Material : PC
Body Colour : White
Light Source : EPISTAR - SMD
Colour Temp (K) : 3000K / 4000K / 6000K
Beam Angle : 120°
LED Current (mA) : 170mA
Input Voltage : AC100-265V

Dimension : Ø110mm x 36mm
Cut-Out : Ø85mm


Junction box Light



Ø85mm




36mm



Ø110mm





LED COB SPOT LIGHT SERIES

Model No.: EB-9312
LED POWER : 1W
 Housing Material : Aluminium
 Body Colour : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 LED Current (mA) : 220mA
 Input Voltage : AC100-240V


Dimension : Ø30mm x 18mm
Cut-Out : Ø25mm





LED COB SPOT LIGHT SERIES

Model No.: EB-9313
LED POWER : 3W
 Housing Material : Aluminium
 Body Colour : White
 Light Source : CREE LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Luminous Flux : 3K (175 lm), 4K (185 lm), 6K (195 lm)
 Beam Angle : 40°
 LED Current (mA) : 280mA
 Input Voltage : AC 100-240V

Dimension : Ø40mm x 55mm
Cut-Out : Ø35mm




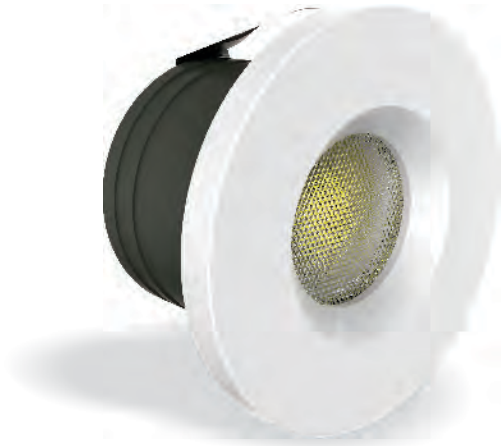

LED COB SPOT LIGHT SERIES

Model No.: EB-9314
LED POWER : 3W
 Housing Material : Aluminium
 Body Colour : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Luminous Flux : 3K (215 lm), 4K (230 lm), 6K (240 lm)
 Beam Angle : 28°
 LED Current (mA) : 300mA
 Input Voltage : AC 100-240V

Dimension : Ø45mm x 27mm
Cut-Out : Ø33mm



LED COB SPOT LIGHT SERIES

Model No.: EB-9316
LED POWER : 3W
 Housing Material : Aluminium
 Body Colour : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Luminous Flux : 3K (215 lm), 4K (230 lm), 6K (240 lm)
 Beam Angle : 28°
 LED Current (mA) : 300mA
 Input Voltage : AC 100-240V

Dimension : 45 x 45mm x 27mm
Cut-Out : Ø33mm







3.3358.tif

LED COB SPOT LIGHT SERIES

Model No.: EB-9310
LED POWER : 1W
Housing Material : Aluminium
Body Colour : White
Light Source : EPISTAR LED
Colour Temp (K) : 3000K / 4000K / 6000K
Luminous Flux : 3K (80 lm), 4K (90 lm), 6K (100 lm)
Beam Angle : 60°
LED Current (mA) : 300mA
Input Voltage : AC85-265V

Dimension : Ø25mm x 17mm
Cut-Out : Ø22mm





LED COB SPOT LIGHT SERIES

Model No.: EB-9309

LED POWER : 2W

Housing Material : Aluminium

Body Colour : White / Black

Light Source : BRIDGELUX LED

Colour Temp (K) : 3000K / 4000K / 6000K

Luminous Flux : 3K (160 lm), 4K (170 lm), 6K (180 lm)

Beam Angle : 24°

LED Current (mA) : 240mA


Input Voltage : AC 85-265V

Dimension : Ø52mm x 28mm

Cut-Out : Ø45mm

SPOT LIGHTS





LED COB SPOT LIGHT SERIES

Model No.: EB-9317

LED POWER : 3W

Housing Material : Aluminium

Body Colour : White

Light Source : EPISTAR LED

Colour Temp (K) : 3000K / 4000K / 6000K

Luminous Flux : 3K (215 lm), 4K (230 lm), 6K (240 lm)


Beam Angle : 30°

LED Current (mA) : 300mA

Input Voltage : AC 100-240V

Dimension : Ø66mm x 33mm

Cut-Out : Ø58mm



LED COB SPOT LIGHT SERIES

Model No.: EB-9318

LED POWER : 3W

Housing Material : Aluminium

Body Colour : White

Light Source : EPISTAR LED

Colour Temp (K) : 3000K / 4000K / 6000K

Luminous Flux : 3K (215 lm), 4K (230 lm), 6K (240 lm)


Beam Angle : 30°

LED Current (mA) : 300mA

Input Voltage : AC 100-240V

Dimension : 66 x 66mm x 33mm

Cut-Out : Ø58mm




LED COB SPOT LIGHT SERIES

Model No.: EB-9319
LED POWER : 5W
Housing Material : Aluminium
Body Colour : White / Copper
Light Source : BRIDGELUX LED
Colour Temp (K) : 3000K / 4000K / 6000K
LED Current (mA) : 280mA
Input Voltage : AC 100-240V

Dimension : Ø46mm x 59mm
Cut-Out : Ø40mm

SPOTLIGHTS



LED COB SPOT LIGHT SERIES

Model No.: EB-9320

LED POWER : 6W

Housing Material : Aluminium

Body Colour : White

Light Source : EPISTAR LED

Colour Temp (K) : 3000K / 4000K / 6000K

Luminous Flux : 3K (430 lm), 4K (450 lm), 6K (480 lm)

Beam Angle : 30°

LED Current (mA) : 280mA

Input Voltage : AC 100-240V

Dimension : Ø76mm x 63mm


Cut-Out : Ø65mm



LED COB SPOT LIGHT SERIES

Model No.: EB-9321
LED POWER : 6W
Housing Material : Aluminium
Body Colour : White
Light Source : EPISTAR LED
Colour Temp (K) : 3000K / 4000K / 6000K
Luminous Flux : 3K (430 lm), 4K (450 lm), 6K (480 lm)
Beam Angle : 30°
LED Current (mA) : 280mA
Input Voltage : AC 100-240V

Dimension : Ø90mm x 70mm
Cut-Out : Ø80mm



ST
HT
GE
LE
PS



LED COB SPOT LIGHT SERIES

Model No.: EB-9322

LED POWER : 6W

Housing Material : Aluminium

Body Colour : White

Light Source : EPISTAR LED


Colour Temp (K) : 3000K / 4000K / 6000K

Luminous Flux : 3K (430 lm), 4K (450 lm), 6K (480 lm)

Beam Angle : 30°



LED Current (mA) : 280mA

Input Voltage : AC 100-240V



Dimension : 90 x 90mm x 70mm
Cut-Out : Ø80mm



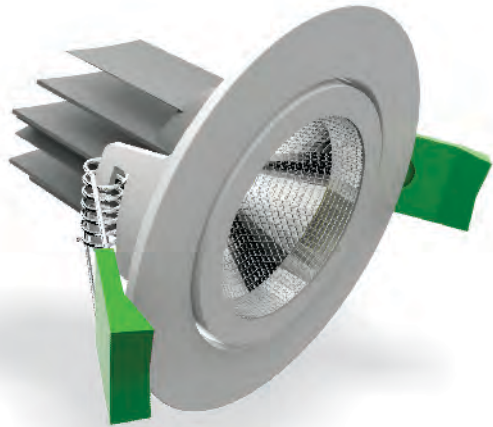

LED COB SPOT LIGHT SERIES


Model No.: EB-9323
LED POWER : 10W
 Housing Material : Aluminium
 Body Colour : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Luminous Flux : 3K (720 lm), 4K (760 lm), 6K (800 lm)
 Beam Angle : 30°
 LED Current (mA) : 300mA
 Input Voltage : AC 100-240V

Dimension : Ø90mm x 65mm
Cut-Out : Ø85mm



LED COB SPOT LIGHT SERIES

Model No.: EB-9329
LED POWER : 10W
 Housing Material : Aluminium
 Body Colour : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Luminous Flux : 3K (720 lm), 4K (760 lm), 6K (800 lm)
 Beam Angle : 30°
 LED Current (mA) : 300mA
 Input Voltage : AC 100-240V




Dimension : 90 x 90mm x 65mm
Cut-Out : Ø85mm



LED COB SPOT LIGHT SERIES

Model No.: EB-9330
LED POWER : 9W
 Housing Material : Aluminium
 Body Colour : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Luminous Flux : 3K (650 lm), 4K (680 lm), 6K (720 lm)
 Beam Angle : 60°
 LED Current (mA) : 300mA
 Input Voltage : AC 110-240V

Dimension : Ø100mm x 55mm
Cut-Out : Ø85mm




LED COB SPOT LIGHT SERIES


Model No.: EB-9324
LED POWER : 18W
 Housing Material : Aluminium
 Body Colour : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Luminous Flux : 3K (1150 lm), 4K (1215 lm), 6K (1280 lm)
 Beam Angle : 30°
 LED Current (mA) : 450mA
 Input Voltage : AC 100-240V

Dimension : Ø110mm x 85mm
Cut-Out : Ø95mm



LED
SPOT
LIGHTS

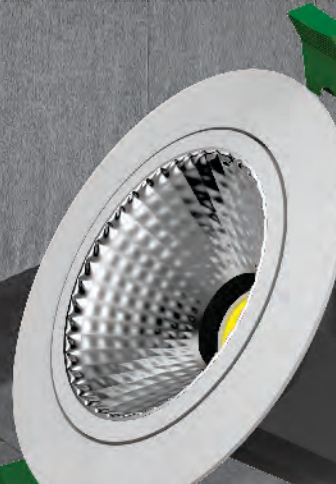



LED COB SPOT LIGHT SERIES

Housing Material : Aluminium
 Body Colour : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Lumens/wt.: 80Lm/W
 Beam Angle : 60°
 Input Voltage : AC 100-240V

Cat. Code	Power(W)	Luminous Flux	LED Current (mA)	Dia (A)	Depth (B)	Cut-Out (C)
EB-9325	21W	1680Lm	500mA	Ø145mm	92mm	Ø130mm
EB-9326	30W	2400Lm	730mA	Ø195mm	96mm	Ø180mm



SPOT LIGHTS




LH
LED COB SPOT LIGHT SERIES



Housing Material : Aluminium
 Body Colour : White
 Light Source : BRIDGELUX LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Lumens/wt.: 80Lm/W
 Beam Angle : 40°
 Input Voltage : 100-240V
 LED Constant Current : 40V

Cat. Code	Power(W)	Luminous Flux	LED Current (mA)	Dia (A)	Depth (B)	Cut-Out (C)
EB-9327	30W	2400Lm	730mA	Ø145mm	84mm	Ø135mm
EB-9328	40W	3200Lm	1800mA	Ø165mm	110mm	Ø150mm





LED COB SPOT LIGHT SERIES


Housing Material : Aluminium
 Body Colour : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Lumens/wt.: 80Lm/W
 Beam Angle : 30°
 Input Voltage : AC 100-240V

Cat. Code	Power(W)	Luminous Flux	LED Current (mA)	Dia (A)	Depth (B)	Cut-Out (C)
EB-9332	3W	240Lm	300mA	Ø65mm	30mm	Ø60mm
EB-9333	6W	480Lm	280mA	Ø80mm	65mm	Ø70mm
EB-9334	12W	960Lm	300mA	Ø105mm	90mm	Ø90mm





LOW HEIGHT SPOT LIGHTS



LED LOW HEIGHT COB SPOT LIGHT SERIES


Housing Material : Aluminium
 Body Colour : White
 Light Source : EVERSTAR LED
 Colour Temp (K) : 3000K / 4000K / 6500K
 Lumens/wt.: 80Lm/W
 Beam Angle : 30°
 Input Voltage : AC 220-240V

Cat. Code	Power(W)	Luminous Flux	LED Current (mA)	Dia (A)	Depth (B)	Cut-Out (C)
EB-9381	3W	240Lm	9V - 350mA	Ø65mm	25mm	Ø55mm
EB-9382	5W	400Lm	36V - 150mA	Ø85mm	25mm	Ø75mm
EB-9383	10W	800Lm	36V - 250mA	Ø105mm	30mm	Ø90mm
EB-9384	15W	1200Lm	36V - 350mA	Ø115mm	35mm	Ø95mm
EB-9385	20W	1600Lm	36V - 500mA	Ø135mm	40mm	Ø115mm




**GU10 - DIMMABLE
LED RETROFIT LAMP**

Model No.: EB-9004
LED POWER : 6W
 Housing Material : Aluminium / PC
 Body Colour : White
 Category : Retrofit Lamp
 Light Source : GU10 LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Beam Angle : 38°
 Input Voltage : 220-240V, AC50Hz
 Operating Temp.: 0° to 50°C




Dimension : Ø50mm x 55mm

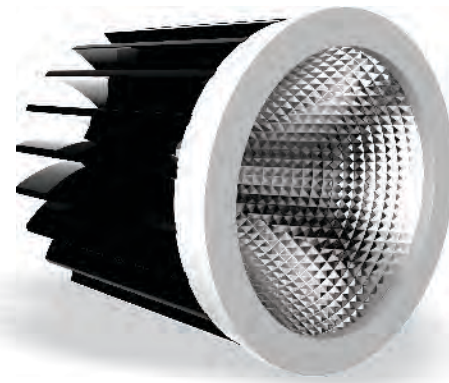

**LH
LED MODULE LIGHT**

Model No.: EB-9007
LED POWER : 7W
 Housing Material : Aluminium + PC Ring
 Body Colour : White
 Light Source : BRIDGELUX LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Luminous Flux : 3K (690 lm), 4K (730 lm), 6K (770 lm)
 Beam Angle : 30°
 LED Constant Current (mA) : 150mA, 40V
 Input Voltage : AC 100-240V

Dimension : Ø50mm x 55mm

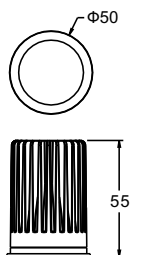




LH
LED DOWNLIGHT - PLASTIC BODY


Model No.: EB-9304
LED POWER : 3W
 Housing Material : ABS Ring
 Body Colour : White
 Light Source : EDISON LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Luminous Flux : 3K (300 lm), 4K (320 lm), 6K (350 lm)
 Beam Angle : 120°
 Input Voltage : 220-240V

Dimension : Ø115mm x 35mm
Cut-Out : Ø80mm



LED STEP LIGHT


Model No.: EB-9501
LED POWER : 3W
 Housing Material : ABS COVER
 Body Colour : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K
 Luminous Flux : 3K (240 lm)
 Beam Angle : 30°
 LED Constant (mA) : 350mA
 Input Voltage : AC 100-240V

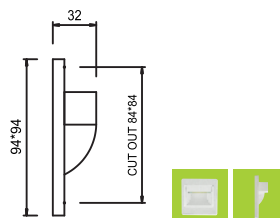

Dimension : 94 x 94mm x 32mm
Cut-Out : 84 x 84mm





STEP LIGHT



Cat. Code	Power(W)	LED Current (mA)	Dia (A)	Depth (B)
EB-9418	3W	800mA	Ø45mm	55mm
EB-9419	8W	240mA	Ø55mm	60mm
EB-9420	12W	240mA	Ø68mm	65mm

LED SURFACE SPOT LIGHT SERIES

Housing Material : Aluminium
 Body Colour : White / Black
 Light Source : CREE LED
 Colour Temp (K) : 3000K / 4000K
 Lumens/wt.: 80Lm/W
 Beam Angle : 30°
 Input Voltage : 100-240V

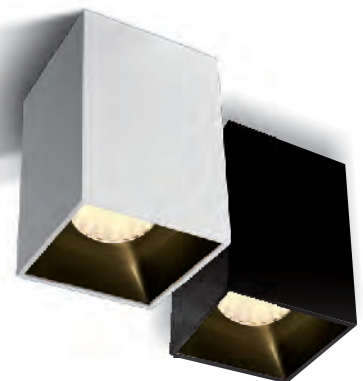


Cat. Code	Power(W)	LED Current (mA)	Dia (A)	Depth (B)
EB-9421	8W	240mA	55x55mm	57mm



LED SURFACE SPOT LIGHT SERIES


Model No.: EB-9431
LED POWER : 15W
Housing Material : Aluminium
Body Colour : White / Black with Inside Black Body.
Light Source : CREE LED
Colour Temp (K) : 3000K / 4000K
Beam Angle : 20°
Input Voltage : 220-240V

Dimension : 110x55x57mm

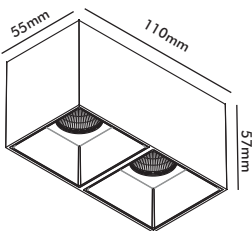



OPTIONAL REFLECTORS





LED SURFACE SPOT LIGHT SERIES

Housing Material : Aluminium
 Body Colour : White / Black
 Light Source : BRIDGELUX LED
 Colour Temp (K) : 3000K / 4000K / 5700K
 Lumens/wt.: 80Lm/W
 Beam Angle : 30°
 Input Voltage : AC 100-240V

Cat. Code	Power(W)	Luminous Flux	LED Current (mA)	Dia (A)	Depth (B)	Cut-Out (C)
EB-9423	12W	960Lm	300mA	Ø73mm	100mm	-
EB-9424	20W	1600Lm	500mA	Ø94mm	116mm	-
EB-9425	30W	2400Lm	800mA	Ø115mm	125mm	-



OPTIONAL REFLECTORS



LED SURFACE SPOT LIGHT SERIES

Housing Material : Aluminium
 Body Colour : White / Black
 Light Source : BRIDGELUX LED
 Colour Temp (K) : 3000K / 4000K / 5700K
 Lumens/wt.: 80Lm/W
 Beam Angle : 30°
 Input Voltage : 220-240V

Cat. Code	Power(W)	Luminous Flux	LED Current (mA)	Dia (A)	Depth (B)	Cut-Out (C)
EB-9427	12W	960Lm	300mA	73x73mm	95mm	-
EB-9428	20W	1600Lm	500mA	95x95mm	110mm	-
EB-9429	30W	2400Lm	800mA	115x115mm	125mm	-



SURFACE LIGHTS



IRIS LED SURFACE CABINET LIGHT

Housing Material : PC
Body Color : WHITE
Light Source : EPISTAR LED
Col. Temp.: 3000K/4000K/6000K
Beam Angle : 120°



Cat. Code	Power(W)	Dia (A)	Depth (B)
EB-9301	2W	Ø44mm	9mm
EB-9302	3W	Ø61mm	9mm
EB-9303	6W	Ø90mm	20mm

Cat. Code	Power(W)	Dia (A)	Depth (B)
EB-9306	2W	44x44mm	9mm
EB-9307	3W	57x57mm	9mm
EB-9308	6W	85x85mm	20mm







IRIS

LED SURFACE CABINET LIGHT

Housing Material : PC
 Body Color : WHITE
 Light Source : EPISTAR LED
 Col. Temp.: 3000K/4000K/6000K
 Beam Angle : 120°

Cat. Code	Power(W)	Dia (A)	Depth (B)
EB-9131	4W	327x23mm	8mm
EB-9132	8W	586x23mm	8mm
EB-9133	12W	901x23mm	8mm
EB-9134	18W	1200x23mm	8mm



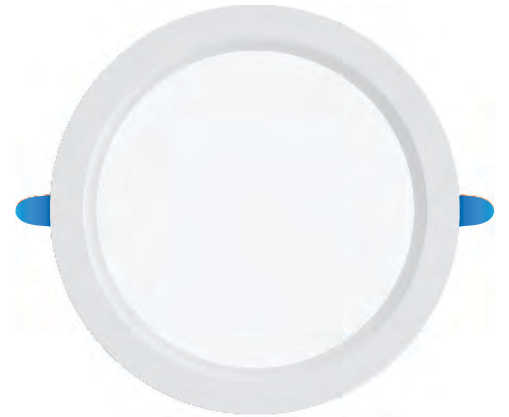

COMET

LED RECESSED DOWNLIGHT

Housing Material : Aluminium
 Body Colour : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Beam Angle : 120°
 CRI : 80
 LED Constant Current (mA) : 350mA
 Input Voltage : AC 100-240V

Cat. Code	Power(W)	Luminous Flux	LED Current (mA)	Dia (A)	Depth (B)	Cut-Out (C)
EB-9375	15W	1500Lm	350mA	Ø165mm	Ø48mm	Ø155
EB-9376	22W	2200Lm	350mA	Ø220mm	Ø48mm	Ø205

DOWNLIGHTS





TONE

TRIM-LESS PANEL LIGHT SERIES


Housing Material : Aluminium
 Body Colour : WHITE
 LED Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Beam Angle : 110°
 CRI : >80
 Input Voltage : 90-250VAC



**NORMAL
PANEL LIGHT**



**TONE
PANEL LIGHT**



Cat. Code	Power(W)	Luminous Flux	LED Current (mA)	Dia (A)	Depth (B)	Cut-Out (C)
EB-9612	8W	640Lm	240mA	Ø95mm	19mm	Ø85mm
EB-9614	15W	1200Lm	360mA	Ø153mm	19mm	Ø142mm
EB-9615	22W	1800Lm	240mA	Ø178mm	19mm	Ø168mm

TRIM-LESS PANEL LIGHT SERIES


Housing Material : Aluminium
 Body Colour : WHITE
 LED Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Beam Angle : 110°
 CRI : >80
 Input Voltage : 90-250VAC



**NORMAL
PANEL LIGHT**



**TRIM-LESS
PANEL LIGHT**




Cat. Code	Power(W)	Luminous Flux	LED Current (mA)	Dia (A)	Depth (B)	Cut-Out (C)
EB-9617	8W	640Lm	240mA	95x95mm	19mm	85x85mm
EB-9619	15W	1200Lm	360mA	153x153mm	19mm	142x142mm
EB-9620	22W	1800Lm	240mA	178x178mm	19mm	168x168mm



SONIC

LED SLIM RECESSED PANEL - PC

Housing Material : PC
 Body Colour : WHITE
 LED Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Beam Angle : 90°
 CRI : >80
 Input Voltage : 220-240V




Cat. Code	Power(W)	Luminous Flux	LED Current (mA)	Dia (A)	Depth (B)	Cut-Out (C)
EB-9622	6W	540Lm	180mA	Ø116mm	36mm	Ø105mm
EB-9623	9W	900Lm	90mA	Ø116mm	36mm	Ø105mm
EB-9625	15W	1350Lm	230mA	Ø166mm	36mm	Ø155mm
EB-9627	22W	1980Lm	220mA	Ø220mm	36mm	Ø205mm




SONIC

LED SLIM RECESSED PANEL - PC

Housing Material : PC
 Body Colour : WHITE
 LED Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Beam Angle : 90°
 CRI : >80
 Input Voltage : 220-240V

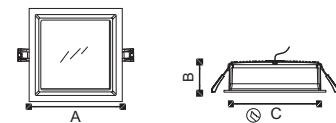

Cat. Code	Power(W)	Luminous Flux	LED Current (mA)	Dia (A)	Depth (B)	Cut-Out (C)
EB-9632	6W	540Lm	180mA	116x116mm	36mm	105x105mm
EB-9633	9W	900Lm	90mA	116x116mm	36mm	105x105mm
EB-9635	15W	1350Lm	230mA	166x166mm	36mm	155x155mm
EB-9637	22W	1980Lm	220mA	220x220mm	36mm	205x205mm






VISION
LED RECESSED PANEL LIGHT

Housing Material : Aluminium
 Body Colour : White
 Light Source : SMD-2835
 Colour Temp (K) : 3000K / 4000K / 6000K
 Beam Angle : 120°
 CRI : 80
 Input Voltage : 100-265VAC 50/60Hz

NO LIGHT LEAK RECESSED PANEL LIGHT

Cat. Code	Power(W)	Luminous Flux	LED Current (mA)	Dia (A)	Depth (B)	Cut-Out (C)
EB-9652	4W	320Lm	300mA	Ø85mm	12mm	Ø72mm
EB-9653	8W	640Lm	300mA	Ø120mm	12mm	Ø110mm
EB-9654	12W	960Lm	300mA	Ø170mm	12mm	Ø160mm
EB-9655	15W	1200Lm	300mA	Ø170mm	12mm	Ø160mm
EB-9656	22W	1760Lm	300mA	Ø225mm	12mm	Ø210mm
EB-9657	30W	2400Lm	300mA	Ø300mm	12mm	Ø285mm

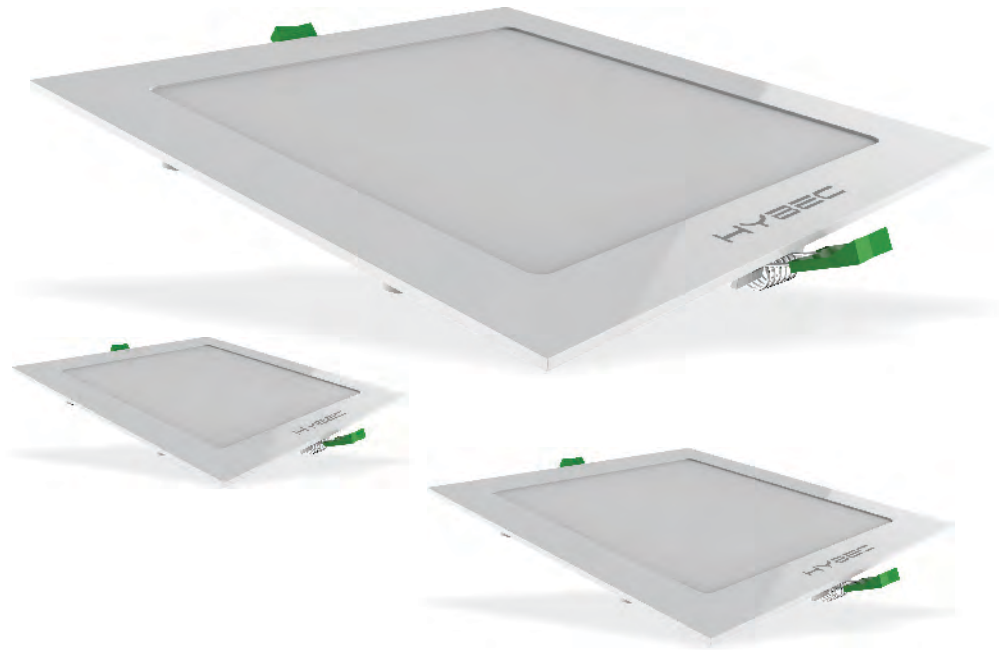

VISION

LED RECESSED PANEL LIGHT

Housing Material : Aluminium
 Body Colour : White
 Light Source : SMD-2835
 Colour Temp (K) : 3000K / 4000K / 6000K
 Beam Angle : 120°
 CRI : 80
 Input Voltage : 100-265VAC 50/60Hz



NO LIGHT LEAK RECESSED PANEL LIGHT

Cat. Code	Power(W)	Luminous Flux	LED Current (mA)	Dia (A)	Depth (B)	Cut-Out (C)
EB-9662	4W	320Lm	300mA	85x85mm	12mm	72x72mm
EB-9663	8W	640Lm	300mA	120x120mm	12mm	110x110mm
EB-9664	12W	960Lm	300mA	170x170mm	12mm	160x160mm
EB-9665	15W	1200Lm	300mA	170x170mm	12mm	160x160mm
EB-9666	22W	1760Lm	300mA	225x225mm	12mm	210x210mm
EB-9667	30W	2400Lm	300mA	300x300mm	12mm	285x285mm

LED BACK LITE PANEL LIGHT with LENS

Housing Material : Aluminium
Model No.: EB-9543
 Body Colour : White
LED POWER : 40W
 Power Factor : 0.90
 Colour Temp (K) : 3000K / 4000K / 6000K
 Current : 900mA
 Beam Angle : 120°
 Luminous Efficiency : 100Lm/W
 CRI : > 80
 LED Current (mA) : 350mA
 Input Voltage : AC220-240V 50/60Hz

Dimension : 595 x 595 x 30mm

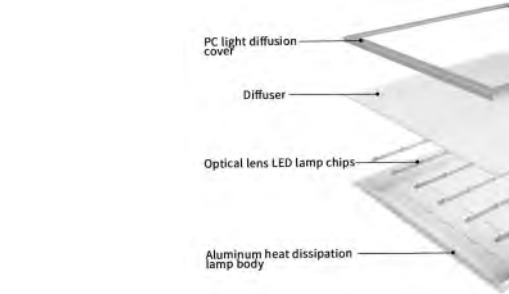


MULTIPURPOSE PANEL LIGHT (sidelite)

- SURFACE OPTION
- RECESSED OPTION
- SUSPENDED OPTION

Model No.: EB-9544
Housing Material : Aluminium
LED POWER : 40W
 Body Colour : White
 Led Source : 4014 LED 192pcs
 Colour Temp (K) : 3000K / 4000K / 6500K
 Beam Angle : 120°
 CRI : >80
 Luminous Efficiency : 90-100Lm/W
 Operation Temp. : -10°C to +40° C
 Input Voltage : 120-277V 50/60Hz
 IP : IP20


Dimension : 595 x 595 x 7mm

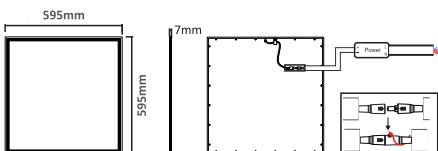

MULTIPURPOSE


PANEL LIGHT (sidelite)

- SURFACE OPTION
- RECESSED OPTION
- SUSPENDED OPTION

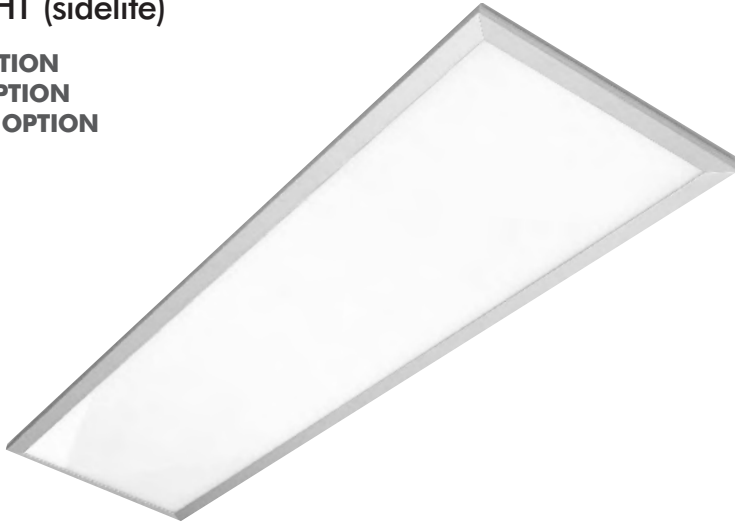


Model No.: EB-9548
Housing Material: Aluminium
LED POWER: 40W
 Body Colour : White
 Led Source : 4014 LED 192pcs
 Colour Temp (K) : 3000K / 4000K / 6500K
 Beam Angle : 120°
 CRI : >80
 Luminous Efficiency : 90-100Lm/W
 Operation Temp. : -10°C to +40° C
 Input Voltage : 120-277V 50/60Hz
 IP : IP20

Dimension : 1195 x 295 x 7mm

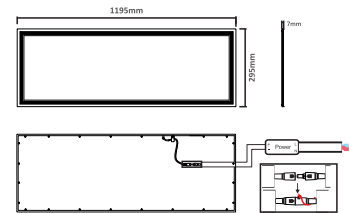

Model No.: EB-9549
Housing Material: Aluminium
LED POWER: 40W
 Body Colour : White
 Led Source : 4014 LED 192pcs
 Colour Temp (K) : 3000K / 4000K / 6500K
 Beam Angle : 120°
 CRI : >80
 Luminous Efficiency : 90-100Lm/W
 Operation Temp. : -10°C to +40° C
 Input Voltage : 120-277V 50/60Hz
 IP : IP20

Dimension : 1195 x 145 x 7mm

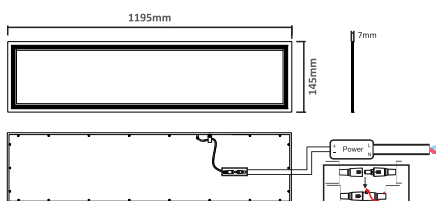

MULTIPURPOSE

PANEL LIGHT (sidelite)

- SURFACE OPTION
- RECESSED OPTION
- SUSPENDED OPTION




VELO

LED RECESSED DOWNLIGHT

Housing Material : Aluminium
 Body Colour : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Beam Angle : 90°
 CRI : 80
 Input Voltage : 90-250VAC 50/60Hz

Cat. Code	Power(W)	Luminous Flux	LED Current (mA)	Dia (A)	Depth (B)	Cut-Out (C)
EB-9342	8W	760Lm	240mA	Ø113mm	35mm	Ø98mm
EB-9343	15W	1425Lm	360mA	Ø145mm	35mm	Ø130mm
EB-9344	22W	2090Lm	240mA	Ø175mm	35mm	Ø160mm





VELO

LED RECESSED DOWNLIGHT

Housing Material : Aluminium
 Body Colour : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Beam Angle : 90°
 CRI : 80
 Input Voltage : 90-250VAC 50/60Hz


Cat. Code	Power(W)	Luminous Flux	LED Current (mA)	Dia (A)	Depth (B)	Cut-Out (C)
EB-9347	8W	760Lm	240mA	113x113mm	35mm	98x98mm
EB-9348	15W	1425Lm	360mA	145x145mm	35mm	130x130mm
EB-9349	22W	2090Lm	240mA	175x175mm	35mm	160x160mm



XILO

LED RECESSED DOWNLIGHT

Housing Material : Aluminium
 Body Colour : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Beam Angle : 90°
 CRI : 80
 Input Voltage : 90-250VAC 50/60Hz




Cat. Code	Power(W)	Luminous Flux	LED Current (mA)	Dia (A)	Depth (B)	Cut-Out (C)
EB-9572	8W	800Lm	240mA	Ø123mm	47mm	Ø100mm
EB-9574	15W	1500Lm	250mA	Ø164mm	47mm	Ø150mm
EB-9575	22W	2200Lm	300mA	Ø189mm	47mm	Ø175mm

XILO

LED RECESSED DOWNLIGHT

Housing Material : Aluminium
 Body Colour : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Beam Angle : 90°
 CRI : 80
 Input Voltage : 90-250VAC 50/60Hz

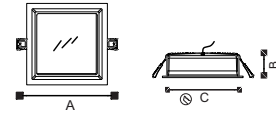

Cat. Code	Power(W)	Luminous Flux	LED Current (mA)	Dia (A)	Depth (B)	Cut-Out (C)
EB-9582	8W	800Lm	240mA	123x123mm	47mm	100x100mm
EB-9584	15W	1500Lm	250mA	164x164mm	47mm	150x150mm
EB-9585	22W	2200Lm	300mA	189x189mm	47mm	175x175mm




LOCUS

LED ULTRA SLIM RIM PANEL LIGHT

Housing Material : Aluminium
 Body Colour : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Beam Angle : 90°
 CRI : 80
 Input Voltage : 90-250VAC 50/60Hz

ULTRA SLIM RIM



Cat. Code	Power(W)	Luminous Flux	LED Current (mA)	Dia (A)	Depth (B)	Cut-Out (C)
EB-9351	5W	450Lm	240mA	Ø70mm	20mm	Ø60mm
EB-9532	8W	720Lm	240mA	Ø110mm	18.5mm	Ø100mm
EB-9534	15W	1350Lm	240mA	Ø165mm	18.5mm	Ø150mm


LOCUS

LED ULTRA SLIM RIM PANEL LIGHT

Housing Material : Aluminium
 Body Colour : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Beam Angle : 90°
 CRI : 80
 Input Voltage : 90-250VAC 50/60Hz



ULTRA SLIM RIM



Cat. Code	Power(W)	Luminous Flux	LED Current (mA)	Dia (A)	Depth (B)	Cut-Out (C)
EB-9358	5W	450Lm	240mA	70x70mm	20mm	60x60mm
EB-9537	8W	720Lm	240mA	110x110mm	18.5mm	100x100mm
EB-9539	15W	1350Lm	240mA	165x165mm	18.5mm	150x150mm



DIRO

LED SURFACE CEILING LIGHT

Housing Material : Aluminium
 Body Colour : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Beam Angle : 90°
 CRI : 80
 Input Voltage : 90-250VAC 50/60Hz



Cat. Code	Power(W)	Luminous Flux	LED Current (mA)	Dia (A)	Depth (B)	Cut-Out (C)
EB-9362	8W	800Lm	240mA	Ø113mm	33mm	-
EB-9363	16W	1600Lm	240mA	Ø168mm	33mm	-
EB-9364	24W	2300Lm	240mA	Ø218mm	33mm	-
EB-9365	35W	3000Lm	770mA	Ø300mm	33mm	-

DIRO

LED SURFACE CEILING LIGHT

Housing Material : Aluminium
 Body Colour : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Beam Angle : 90°
 CRI : 80
 Input Voltage : 90-250VAC 50/60Hz




Cat. Code	Power(W)	Luminous Flux	LED Current (mA)	Dia (A)	Depth (B)	Cut-Out (C)
EB-9367	8W	800Lm	240mA	113x113mm	33mm	-
EB-9368	16W	1600Lm	240mA	168x168mm	33mm	-
EB-9369	24W	2300Lm	240mA	218x218mm	33mm	-
EB-9370	35W	3000Lm	770mA	300x300mm	33mm	-



DOMET

LED TRIM-LESS SURFACE PANEL LIGHT



Housing Material : Aluminium
 Body Colour : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6500K
 Beam Angle : 120°
 CRI : 80
 Input Voltage : 100-300VAC 50/60Hz


Cat. Code	Power(W)	Luminous Flux	LED Current (mA)	Dia (A)	Depth (B)	Cut-Out (C)
EB-9672	8W	480Lm	240mA	Ø120mm	25mm	-
EB-9674	15W	1200Lm	240mA	Ø170mm	25mm	-
EB-9675	22W	1750Lm	240mA	Ø225mm	25mm	-



DOMET

LED TRIM-LESS SURFACE PANEL LIGHT


Housing Material : Aluminium
 Body Colour : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6500K
 Beam Angle : 120°
 CRI : 80
 Input Voltage : 100-300VAC 50/60Hz



Cat. Code	Power(W)	Luminous Flux	LED Current (mA)	Dia (A)	Depth (B)	Cut-Out (C)
EB-9682	8W	480Lm	240mA	120x120mm	25mm	-
EB-9684	15W	1200Lm	240mA	170x170mm	25mm	-
EB-9685	22W	1750Lm	240mA	225x225mm	25mm	-
EB-9686	30W	2400Lm	770mA	300x300mm	35mm	-



LINEAR PROFILE LIGHTS

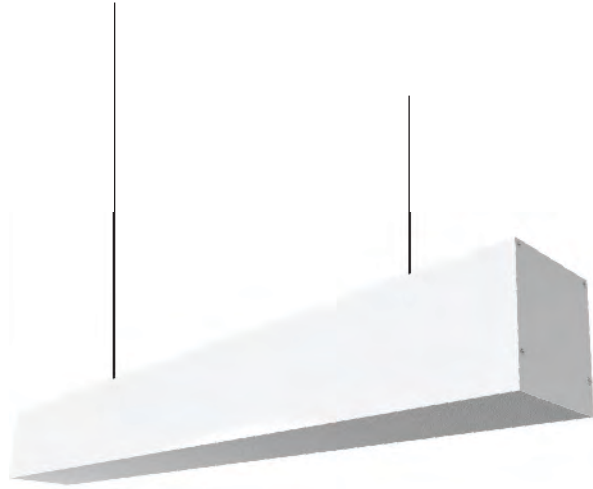

LH LED LINEAR PROFILE LIGHT

Model No.: EB-6542
LED POWER : 20W/4FT.

Housing


Housing Material : Extruded Aluminium
Diffuser : Polycarbonate
Mounting Type : Suspended
Mounting Accessories : Suspension Kit

LED Source

Light Source : Everlite LED 2835, 0.2W
Beam Angle : 120°
CCT : 3000K / 4000K / 6500K
CRI : 80
Chip Lumen : 100LM/W.

Electrical Parameters

Ballast Make : "HYBEC" BIS Approved
Input Voltage : 220-240 V AC
Rated Frequency : 50/60Hz
Power Factor : >0.90
THD Ballast : <20%
Constant Current (mA) : 36V, 500mA




FIXED LENGTH : 4FT.

Dimension : 35mm x 65mm





LINEAR PROFILE LIGHTS

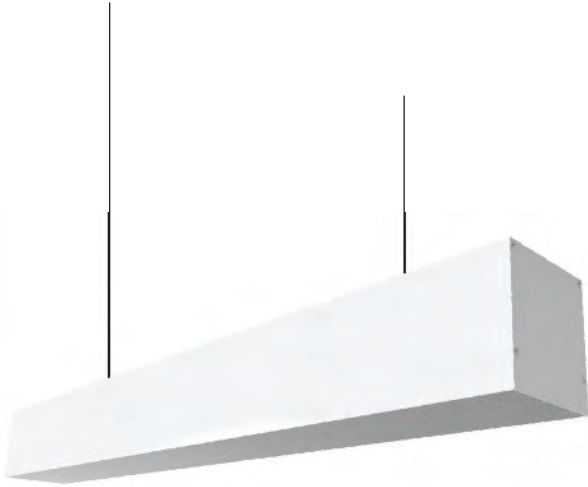

LH
LED LINEAR PROFILE LIGHT

Model No.: EB-6545
LED POWER : 36W/4FT.

Housing

Housing Material : Extruded Aluminium
Diffuser : Polycarbonate
Mounting Type : Suspended
Mounting Accessories : Suspension Kit


LED Source

Light Source : Everlite LED 2835, 0.2W
Beam Angle : 120°
CCT : 3000K / 4000K / 6500K
CRI : 80
Chip Lumen : 100LM/W.


Electrical Parameters

Ballast Make : "HYBEC" BIS Approved
Input Voltage : 220-240 V AC
Rated Frequency : 50/60Hz
Power Factor : >0.90
THD Ballast : <20%
Constant Current (mA) : 36V, 1000mA

Dimension : 50mm x 65mm



FIXED LENGTH : 4FT.

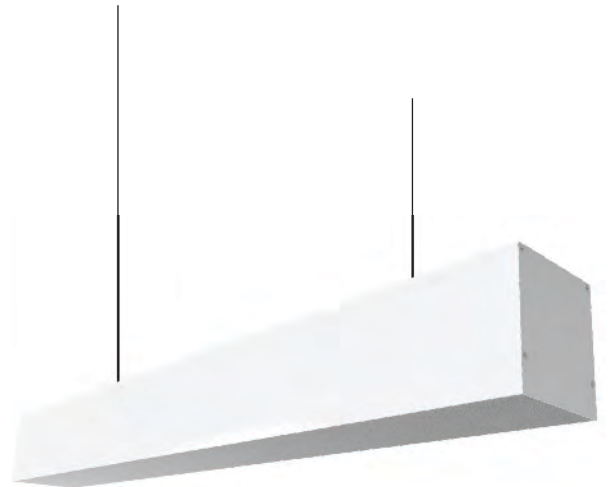

LH
LED LINEAR PROFILE LIGHT

Model No.: EB-6565
LED POWER : 40W/4FT.

Housing

Housing Material : Extruded Aluminium
Diffuser : Polycarbonate
Mounting Type : Suspended
Mounting Accessories : Suspension Kit


LED Source

Light Source : Everlite LED 2835, 0.2W
Beam Angle : 120°
CCT : 3000K / 4000K / 6500K
CRI : 80
Chip Lumen : 100LM/W.

Electrical Parameters

Ballast Make : "HYBEC" BIS Approved
Input Voltage : 220-240 V AC
Rated Frequency : 50/60Hz
Power Factor : >0.90
THD Ballast : <20%
Constant Current (mA) : 40V, 1200mA

Dimension : 70mm x 65mm



FIXED LENGTH : 4FT.



LINEAR PROFILE LIGHTS



LH
LED MINI LASER LINEAR PROFILE LIGHT
(Reflector : 18mmx18mm)


Model No.: EB-6567
LED POWER : 36W/1160mm.

Housing
Housing Material : Extruded Aluminium
Diffuser : Polycarbonate / Prismatic Laser Lens
Mounting Type : Suspended
Mounting Accessories : Suspension Kit

LED Source
Light Source : Everlite / Osram LED 2835, 1W / 3030 6W/LED
Beam Angle : -
CCT : 3000K / 4000K / 6500K
CRI : 80
Chip Lumen : 120LM/W.

Electrical Parameters
Ballast Make : "HYBEC" BIS Approved
Input Voltage : 220-240 V AC
Rated Frequency : 50/60Hz
Power Factor : >0.90
THD Ballast : <20%
Constant Current (mA) : 300mA, 20V or 40V
Driver : In-Built Driver

Dimension : 26mm x 66mm

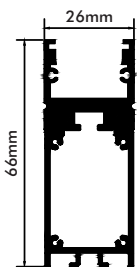

FIXED LENGTH : 1160mm.

LH
LED MINI LASER LINEAR PROFILE LIGHT
(Reflector : 18mmx18mm)


Model No.: EB-6568
LED POWER : 36W/1160mm.

Housing
Housing Material : Extruded Aluminium
Diffuser : Polycarbonate / Prismatic Laser Lens
Mounting Type : Suspended
Mounting Accessories : Suspension Kit


LED Source
Light Source : Everlite / Osram LED 3030 1W/LED
Beam Angle : -
CCT : 3000K / 4000K / 6500K
CRI : 80
Chip Lumen : 120LM/W.

Electrical Parameters
Ballast Make : "HYBEC" BIS Approved
Input Voltage : 220-240 V AC
Rated Frequency : 50/60Hz
Power Factor : >0.90
THD Ballast : <20%
Constant Current (mA) : 300mA, 20V or 40V
Driver : In-Built Driver

Dimension : 26mm x 66mm

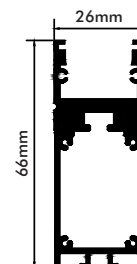

FIXED LENGTH : 1160mm.

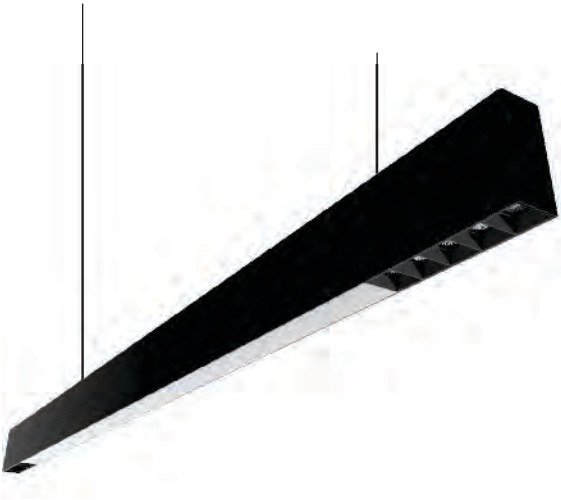

LH
LED REGULAR LASER LINEAR PROFILE LIGHT


Model No.: EB-6570
LED POWER : 36W/1200mm.

Housing
Housing Material : Extruded Aluminium
Diffuser : Polycarbonate / Prismatic Laser Lens
Mounting Type : Suspended
Mounting Accessories : Suspension Kit

LED Source
Light Source : Everlite / Osram LED 2835, 0.2W / 3030 1W/LED
Beam Angle : -
CCT : 3000K / 4000K / 6500K
CRI : 80
Chip Lumen : 120LM/W.

Electrical Parameters
Ballast Make : "HYBEC" BIS Approved
Input Voltage : 220-240 V AC
Rated Frequency : 50/60Hz
Power Factor : >0.90
THD Ballast : <20%
Constant Current (mA) : 300mA, 20V or 40V

Dimension : 36mm x 76mm

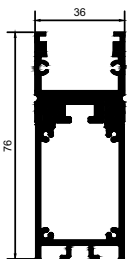

FIXED LENGTH : 1200mm.



LH
LED REGULAR LASER LINEAR PROFILE LIGHT


Model No.: EB-6575
LED POWER : 40W/1200mm.

Housing
Housing Material : Extruded Aluminium
Diffuser : Prismatic Laser Lens
Mounting Type : Suspended
Mounting Accessories : Suspension Kit


LED Source
Light Source : Osram 3030 1W/LED
Beam Angle : --
CCT : 3000K / 4000K / 6500K
CRI : 80
Chip Lumen : 120LM/W.

Electrical Parameters
Ballast Make : "HYBEC" BIS Approved
Input Voltage : 220-240 V AC
Rated Frequency : 50/60Hz
Power Factor : >0.90
THD Ballast : <20%
Constant Current (mA) : 1200mA, 40V

Dimension : 36mm x 76mm

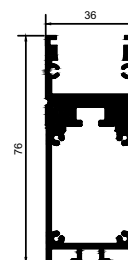

FIXED LENGTH : 1200mm.



FIXED LENGTH : 4FT.

LH LED ROUND SUSPENDED PROFILE LIGHT

Model No.: EB-6595
LED POWER : 36W/4FT.

Housing

Housing Material : Extruded Aluminium
Diffuser : Polycarbonate / Prismatic Laser Lens
Mounting Type : Suspended
Mounting Accessories : Suspension Kit

LED Source

Light Source : Everlite / Osram LED 2835 55LED 0.2W/LED
Beam Angle : -
CCT : 3000K / 4000K / 6500K
CRI : 80
Chip Lumen : 120LM/W.

Electrical Parameters

Ballast Make : "HYBEC" BIS Approved
Input Voltage : 220-240 V AC
Rated Frequency : 50/60Hz
Power Factor : >0.90
THD Ballast : <20%
Constant Current (mA) : 300mA, 20V or 40V
Driver : Separate Driver

Dimension : Ø60mm



LED DOWNLIGHT - SMD

JUNCTION BOX FITTING



UFO LED

Model No.: EB-9671-UFO
LED POWER : 15W
Housing Material : Aluminium + PC
Body Colour : White
Light Source : SMD - 2835 LED
Colour Temp (K) : 3000K / 6500K
Luminous Flux : 80Lm/W
CRI : 80
Size : Ø130x78mm
Cutout : **Ø35mm**
Input Voltage : 85-285VAC 50/60Hz
PF : >0.6

Junction box Light




LED DETACHABLE LIGHT

JUNCTION BOX FITTING

Model No.: EB-9676
LED POWER : 8W
 Housing Material : PC
 Body Colour : White
 Light Source : SMD - 2835 LED
 Beam Angle : 180°
 Luminous Flux : 80Lm/W
 CRI : 80
 Size : Ø110x60mm
 Cutout : Ø75mm
 Input Voltage : AC85-285VAC 50/60Hz
 PF : >0.6
 Surge : 2.5KV
 Power Factor : In Built Driver




Available Colours			
WH+WW	WH+BLUE	WH+GREEN	WH+PINK



Junction box Light





Cat. Code	Power(W)	Light Base	Col. Temp.
EB-9014	3W	B22	6500K
EB-9015	5W	B22	6500K
EB-9016	7W	B22	6500K

ECO LED BULB

LED BULB SERIES

T-SHAPE LED BULB

LED BULB SERIES

Colour Temp (K) : 6500K
Luminous Flux : 100Lm/W
Power Factor : 0.90
CRI : >80
Input Voltage : AC100-264V 50/60Hz

Cat. Code	Power(W)	Light Base	Col. Temp.
EB-9025	35W	B22	6500K
EB-9027	55W	B22	6500K
EB-9030	80W	B22	6500K




ECO CANDLE LAMP

Model No.: EB-9011
LED POWER : 5W
Power Factor : 0.90
Colour Temp (K) : 2700K
Light Base : E14
Beam Angle : 220°
Luminous Flux : 400 lm
CRI : >80
Input Voltage : AC100-264V 50/60Hz

G9 LAMP NON DIMMABLE FLICKER FREE WITH IC

LED G9 LAMP

Model No.: EB-9020
LED POWER : 3.5W
 Housing Material : Ceram + IC + Frosted PC Cover
 Body Colour : White
 Light Source : 2835 SMD
 Colour Temp (K) : 2700K
 Luminous Flux : 350Lm
 Beam Angle : 330°
 CRI : >80
 Size : Ø16xH49mm
 Input Voltage : 230V
 PF : >0.46

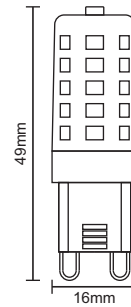



LH 0.5W LED BULB

LED BULB SERIES

Model No.: EB-9180
LED POWER : 0.5W
Luminary Efficacy : Over 60Lm/W
Working Voltage : 90-300VAC
Rated Frequency : 50Hz - 60Hz

Available Colours :
Yellow | Red | Green | Blue | Orange | Milky | Pink



LED LINKABLE TUBELIGHT

- Integrated hard-wired connector, more safety
- Adopts Milky PC cover, with anti-UV & anti-diffuse, soft light
- Easy installation, and available for continuous installation
- More 40% energy saving than the traditional fixture
- Adopts high quality LED chips with high efficiency, uniformity CCT and good lighting effect
- Adopts new designed circuit, reliability, stability and safety



Through integrated hard-wired connector to achieve straight seamless connectivity, more safe and reliable




Through soft-wired connector to achieve turning connection, easily achieve various angles installation

Housing Material : Aluminium & PC
 Body Color : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6500K
 Beam Angle : 120°
 CRI : >80
 Input Voltage : 220-240V

AVAILABLE IN : 1FT, 2FT, 4FT.

Cat. Code	Power(W)	Luminous Flux	Dimension
EB-9101	5W	500Lm	1ft.
EB-9102	11W	900Lm	2ft.
EB-9103	22W	1800Lm	4ft.

Installation Diagram




Installation



Hard connect
MAX connectable 10 sets



Extra Soft connectable

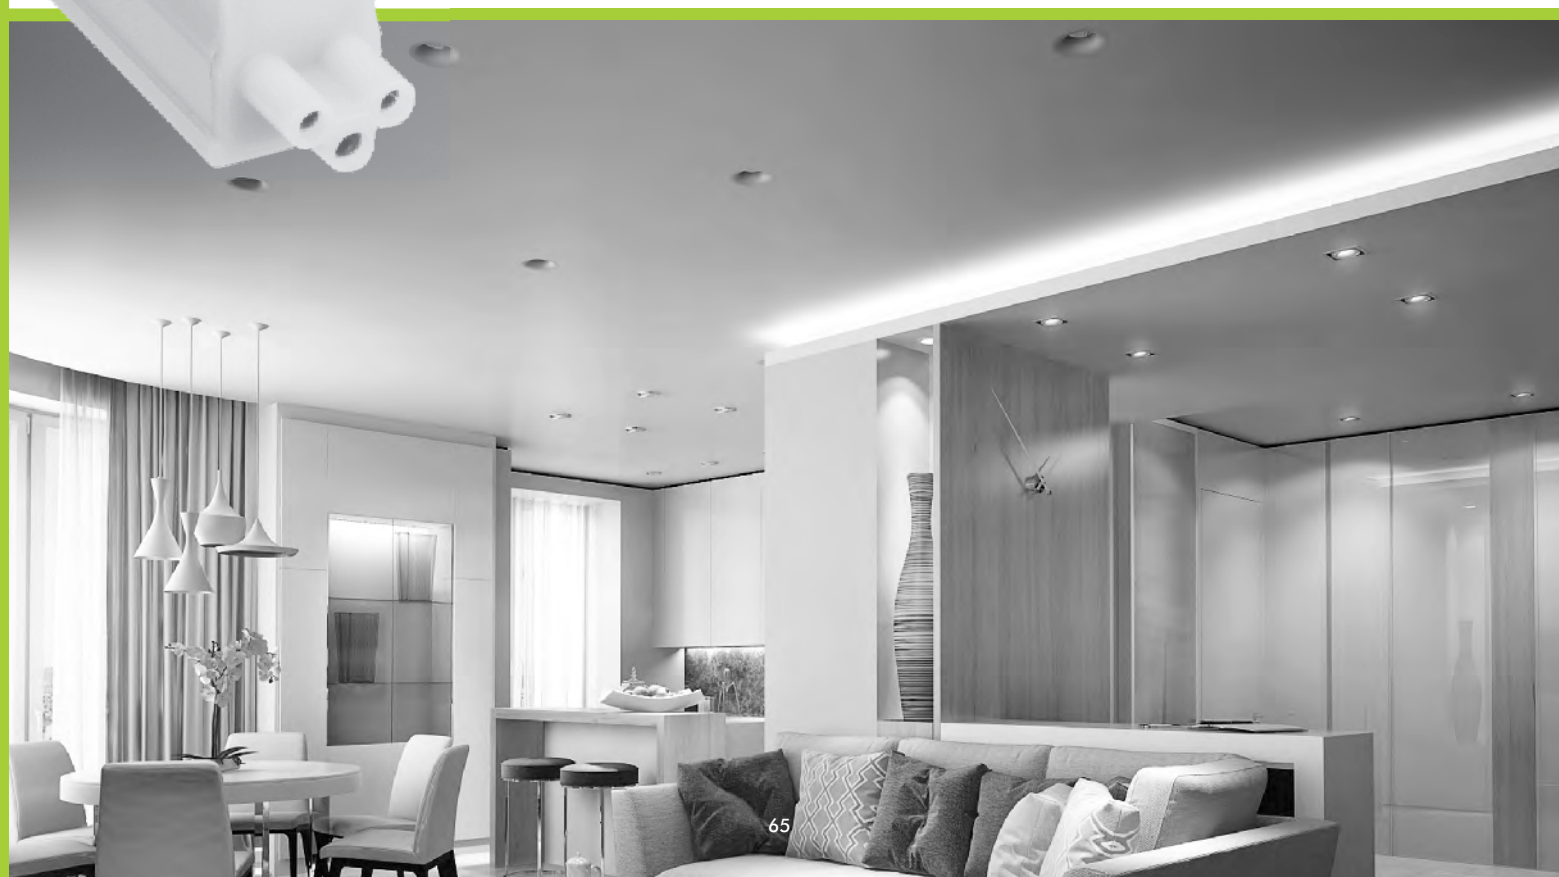



LED T5 SLIM BATTEN LIGHT

Housing Material : PC
 Body Colour : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Beam Angle : 120°
 CRI : >80
 Input Voltage : 220-240V

AVAILABLE : 1FT, 2FT, 4FT.

Cat. Code	Power(W)	Luminous Flux	Dimension
EB-9112	5W	500Lm	312x22x36mm
EB-9113	11W	1000Lm	536x22x36mm
EB-9114	22W	2000Lm	1136x22x36mm




LED COLOR CHANGING T5 BATTEN LIGHT CHANGE THE MOOD WITH LED COLOUR CHANGING BATTEN

Model No.: EB-9110
LED POWER : 22W
 Housing Material : PC
 Body Colour : White
 Colour Temp (K) : 3000K-6000K
 Lumen Output : 2200 Lumens
 Frequency : 50-60Hz
 Power Factor : ≤0.9
 Surge Protection : 2.5Kv
 Input Voltage : AC 90V-264V

Dimension : 1136x22x36mm



3 COLOUR CHANGING LED BATTEN LIGHT FROM 3000K TO 6000K

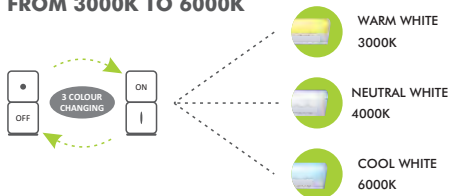

Find the correct position and fix the clippers with screw. The distance between two clippers should be more than 100mm.





LED T5 BATTEN LIGHT

Housing Material : Aluminium Body with Powder Coated
 Body Colour : White
 Colour Temp (K) : 3000K / 4000K / 6000K
 Lumen Output : 100 Lm/W
 Frequency : 50-60Hz
 Power Factor : ≤ 0.95
 Surge Protection : 2.5Kv
 Input Voltage : AC 220V-240V

Cat. Code	Power(W)	Luminous Flux	Dimension
EB-9111	20W	2000Lm	600x30x38mm
EB-9119	40W	4000Lm	1205x30x38mm



LED BATTEN LIGHT

Housing Material : Aluminium
 Body Colour : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Beam Angle : 120°
 CRI : >80
 Input Voltage : 220-240V

AVAILABLE : 1FT, 2FT, 4FT.



with anti-glare high quality diffuser.

Low-carbon Product

Long Life span Energy-saving



Cat. Code	Power(W)	Luminous Flux	Dimension
EB-9115	8W	800Lm	300x38x39mm
EB-9116	15W	1500Lm	600x38x39mm
EB-9117	30W	3000Lm	1200x38x39mm



LED BATTEN HANGING LIGHT

Model No.: EB-9118
LED Power : 30W
 Housing Material : Aluminium
 Body Colour : White
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Beam Angle : 120°
 CRI : >80
 Input Voltage : 220-240V
 Input Voltage : 85V-260V / 50-60Hz

Dimension : 1200x38x39mm



with anti-glare high quality diffuser.

Low-carbon Product

Long Life span Energy-saving

LED T-8 RETROFIT TUBE

Model No.: EB-9120
LED POWER : 18W
 Power Factor : 0.90
 Colour Temp (K) : 6500K
 Light Base : G13
 Luminous Flux : 1800 lm
 CRI : >80
 Input Voltage : AC100-264V 50/60Hz



LED MIRROR LIGHT

Housing Material : PC
 Body Colour : Matt Silver
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K / 4000K / 6000K
 Beam Angle : 120°
 CRI : >80
 Input Voltage : 220-240V
 Input Voltage : 85V-260V / 50-60Hz



Cat. Code	Power(W)	Luminous Flux	Dimension
EB-9122	9W	900Lm	300x36x37mm
EB-9123	15W	1500Lm	600x36x37mm
EB-9124	30W	3000Lm	1200x36x37mm







LED MIRROR LIGHT - COLOUR CHANGING

Housing Material : PC
 Body Colour : Matt Silver
 Light Source : EPISTAR LED
 Colour Temp (K) : 3000K TO 6000K
 Beam Angle : 120°
 CRI : >80
 Input Voltage : 220-240V
 Input Voltage : 85V-260V / 50-60Hz

Cat. Code	Power(W)	Luminous Flux	Dimension
EB-9126	9W	900Lm	300x36x37mm
EB-9127	15W	1500Lm	600x36x37mm

3 COLOUR CHANGING LED MIRROR LIGHT FROM 3000K TO 6000K

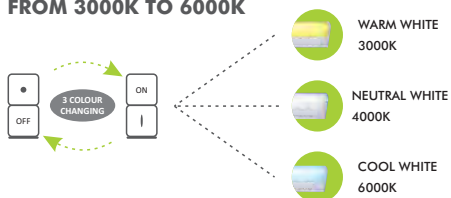

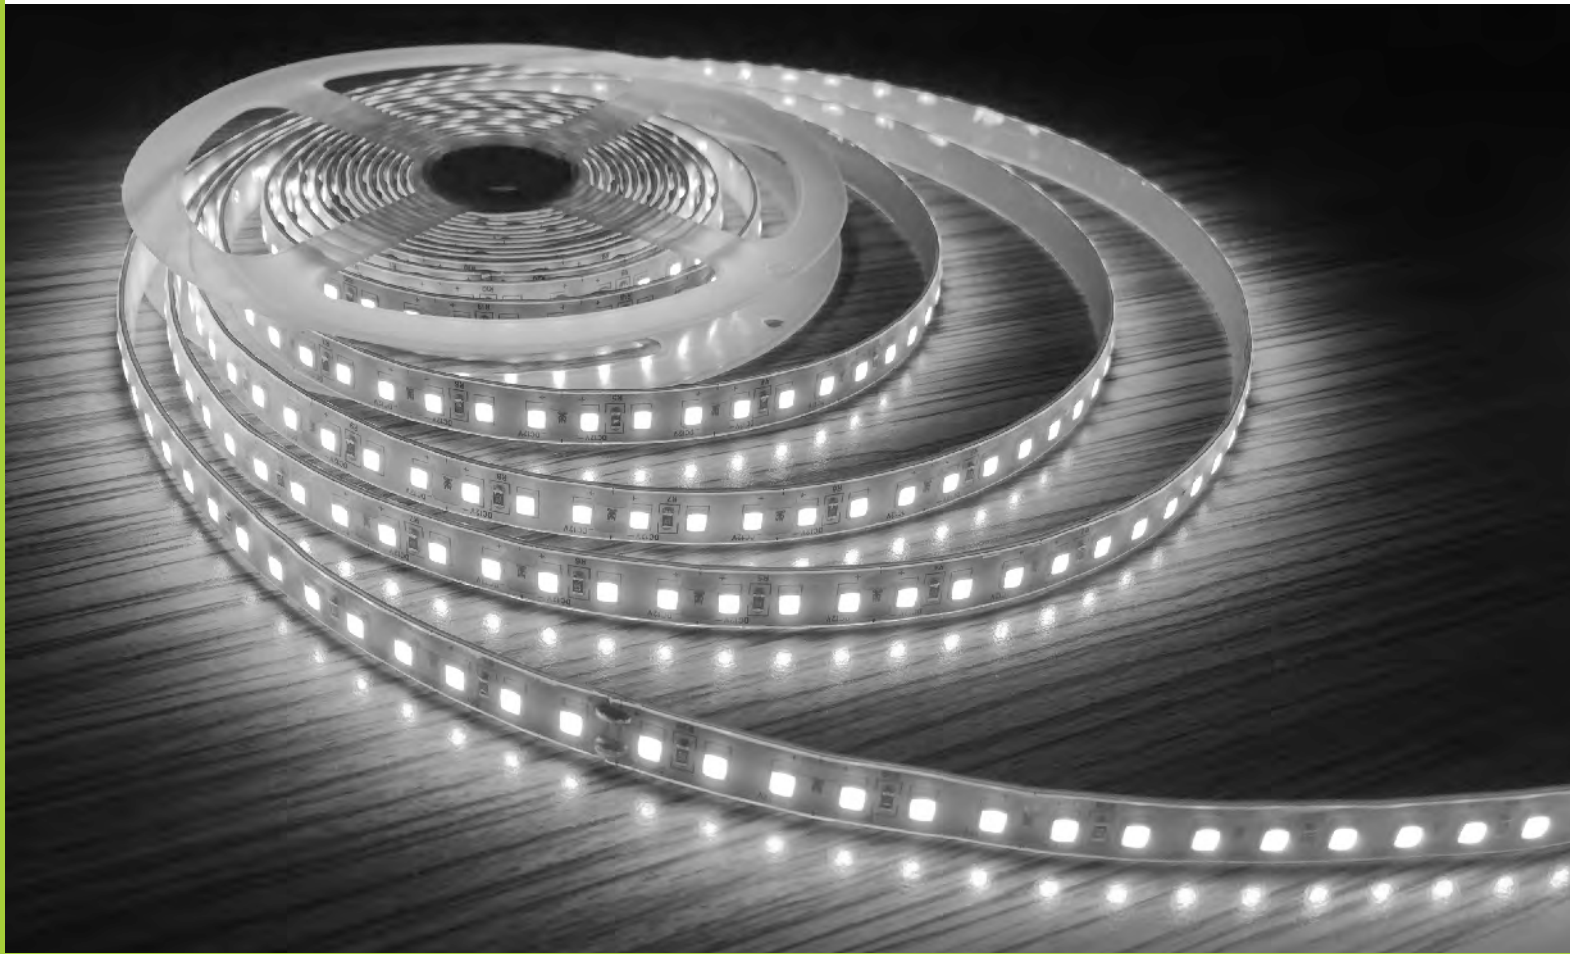

LED FLEXI STRIP LIGHT - NON WATERPROOF INDOOR - 2835 LED - 12V (IP20)

Cat. Code	Power(W)	PCB Size	Colour Temp.	LED Source	IP RATED
EB-9072	6W	8mm	WW/NW/CW/RED/BLUE/GREEN	60 LED/MTR - 2835 LED (12V)	IP20
EB-9075	12W	10mm	WW/NW/CW/RED/BLUE/GREEN	60 LED/MTR - 2835 LED (12V)	IP20
EB-9078	10W	8mm	WW/NW/CW/RED/BLUE/GREEN	120 LED/MTR - 2835 LED (12V)	IP20
EB-9079	10W	5mm	WW/NW/CW	120 LED/MTR - 2835 LED (12V)	IP20
EB-9081	15W	10mm	WW/NW/CW	180 LED/MTR - 2835 LED (12V)	IP20
EB-9096	24W	10mm	WW/NW/CW	240 LED/MTR - 2835 LED (12V)	IP20

LED FLEXI STRIP LIGHT - NON WATERPROOF INDOOR - 5050 LED - 12V (IP20)

Cat. Code	Power(W)	PCB Size	Colour Temp.	LED Source	Cat. Code
EB-9084	7.5W	10mm	WW/NW/CW/RED/BLUE/GREEN	30 LED/MTR - 5050 LED (12V)	IP20
EB-9087	15W	10mm	WW/NW/CW/RED/BLUE/GREEN	60 LED/MTR - 5050 LED (12V)	IP20
EB-9090	7.5W	10mm	RGB	30 LED/MTR - 5050 LED (12V)	IP20
EB-9092	15W	10mm	RGB	60 LED/MTR - 5050 LED (12V)	IP20




LED FLEXI STRIP LIGHTS

LED FLEXI STRIP LIGHT TO BE USE ON PROFILES ONLY IN OUTDOOR

LED FLEXI STRIP LIGHT - WATERPROOF OUTDOOR - 2835 LED - 12V (IP65)

Cat. Code	Power(W)	PCB Size	Colour Temp.	LED Source	Cat. Code
EB-9073	6W	8mm	WW/NW/CW/RED/BLUE/GREEN	60 LED/MTR - 2835 LED (12V)	IP65
NEW EB-9074	12W	8mm	WW/NW/CW	120 LED/MTR - 2835 LED (12V)	IP65
NEW EB-9077	18W	10mm	WW/NW/CW	180 LED/MTR - 2835 LED (12V)	IP65



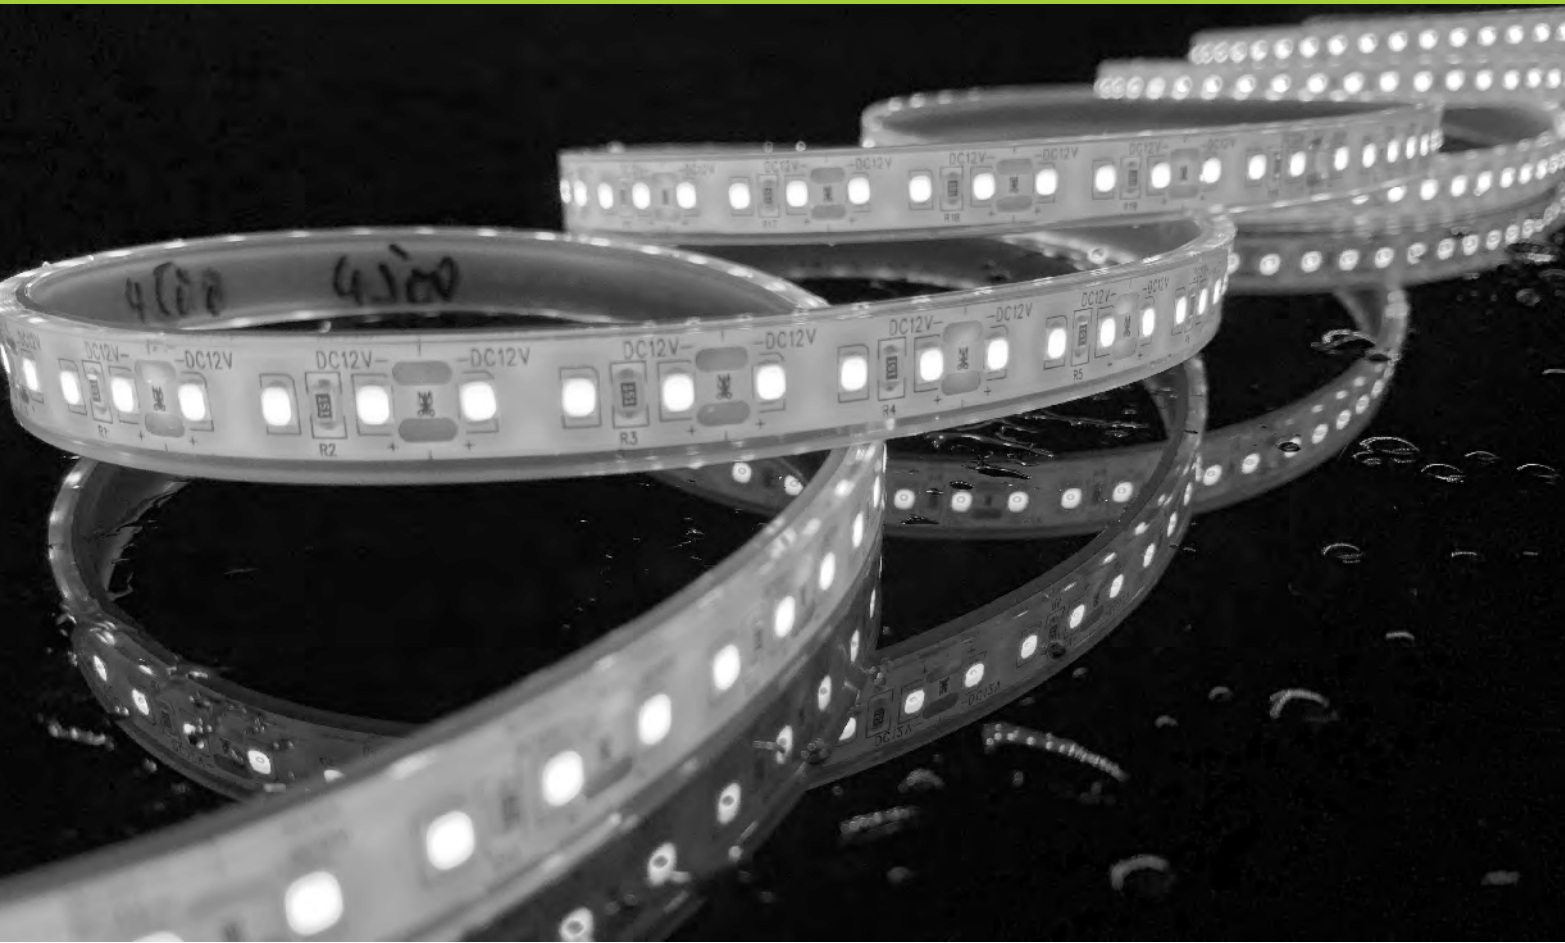

LED FLEXI STRIP LIGHT TO BE USE ON PROFILES ONLY IN OUTDOOR

LED FLEXI STRIP LIGHT - WATERPROOF OUTDOOR - 2835 LED - 12V (IP67)

Cat. Code	Power(W)	PCB Size	Colour Temp.	LED Source	Cat. Code
NEW EB-9095	6W	8mm	WW/NW/CW	60 LED/MTR - 2835 LED (12V)	IP67
NEW EB-9097	12W	8mm	WW/NW/CW	120 LED/MTR - 2835 LED (12V)	IP67
NEW EB-9099	18W	10mm	WW/NW/CW	180 LED/MTR - 2835 LED (12V)	IP67
NEW EB-9100	22W	10mm	WW/NW/CW	240 LED/MTR - 2835 LED (12V)	IP67

LED FLEXI STRIP LIGHT - WATERPROOF OUTDOOR - 5050 LED - 12V (IP67)


Cat. Code	Power(W)	PCB Size	Colour Temp.	LED Source	Cat. Code
NEW VERSION EB-9085	7.5W	10mm	WW/NW/CW/RED/BLUE/GREEN	30 LED/MTR - 5050 LED (12V)	IP68
EB-9088	15W	10mm	WW/NW/CW/RED/BLUE/GREEN	60 LED/MTR - 5050 LED (12V)	IP67
EB-9091	7.5W	10mm	RGB	30 LED/MTR - 5050 LED (12V)	IP67
EB-9093	15W	10mm	RGB	60 LED/MTR - 5050 LED (12V)	IP67

LED 220-240V STRIP LIGHT - OUTDOOR - IP65

Model No.: EB-9080
LED Power : 5W/Mtr
LED Quantity : 60pcs/Mtr
LED Source : 2835 SMD-60P-HV
IP Rating : IP65
Size : 11*6mm
Beam Angle : 120°
Luminous Flux : 11 lm/Chip 450 lm/Mtr
Cutting Unit : 1meter cuttable
Maximum Connection : 50Mtr
Input Voltage : AC230V
Packing : 50Mtr/Roll
with 1pc 0.8M 3KV power cord into a master carton

LED COLOUR :
WARM WHITE / COOL WHITE / RED / YELLOW / PURPLE / BLUE

ACCESSORIES :
MODEL NO.: C-1 - CLIPS
MODEL NO.: C-2 - MIDDLE CONNECTOR
MODEL NO.: C-3 - POWER CORD PLUG+1pin+1end cap

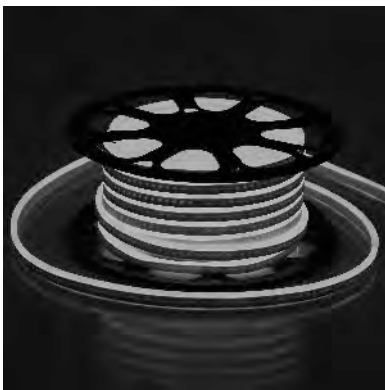

LED NEON FLEX STRIP LIGHT (DOT FREE) OUTDOOR - IP65 (24V)

Model No.: EB-9083
LED Power : 8W/Mtr
LED Quantity : 108pcs/Mtr
LED Source : 2835 SMD-108P-U500 (Medium Size) PVC Coating
IP Rating : IP65
Size : H-18.5, W-10.5mm
Beam Angle : 120°
Luminous Flux : 20-22 lm/Chip 200 lm/Mtr
Cutting Unit : 30cm cuttable
Maximum Connection : 20Mtr
Input Voltage : DC24V
Packing : 20Mtr/Roll
with 1pc cable connector into a master carton





LED STRIP SMPS DRIVERS - 12V

Cat. Code	Power(W)	Input Wattage	Output Wattage	Dimension
EB-9202	24W	150V-265V AC	12 VDC-24W	L93xW33xH26mm
EB-9203	36W	150V-265V AC	12 VDC-36W	L93xW33xH26mm
EB-9205	60W	150V-265V AC	12 VDC-60W	L166xW36xH25mm
EB-9206	72W	150V-265V AC	12 VDC-72W	L166xW36xH25mm
EB-9208	96W	150V-265V AC	12 VDC-96W	L186xW51xH40mm
EB-9210	120W	150V-265V AC	12 VDC-120W	L186xW51xH40mm
EB-9216	192W	150V-265V AC	12 VDC-192W	L210xW68xH43mm
EB-9220	240W	150V-265V AC	12 VDC-240W	L210xW68xH43mm

LED FLOOD LIGHT - OUTDOOR

Housing Material : Aluminium Die-Cast
 Body Colour : Grey
 Col. Temp.: 3000K / 6500K
 Product Factor : ≥ 0.95
 Working Temp. : -25°C to $+50^{\circ}\text{C}$
 Luminous Efficiency : 100Lm/W
 Beam Angle : $90^{\circ}\times 90^{\circ}$
 CRI : ≥ 80
 Input Voltage : 170-400V

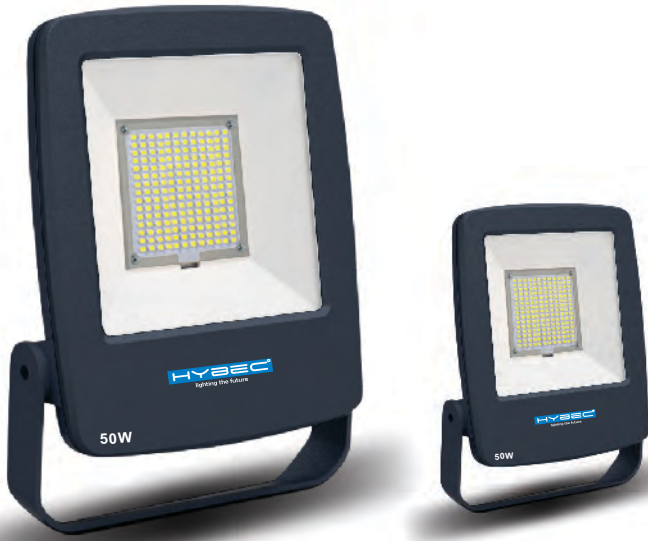

Cat. Code	Power(W)	Luminous Flux	Dimension
EB-9701	50W	5000Lm	174x206xH244x44mm
EB-9702	70W	7000Lm	220x260xH300x44mm
EB-9704	100W	1000Lm	220x260xH300x44mm






LED FLOOD LIGHT OUTDOOR

Housing Material : Aluminium Die-Cast
 Body Colour : Grey
 Col. Temp.: 3000K / 6500K
 Product Factor : ≥ 0.95
 Working Temp. : -25°C to +50°C
 Luminous Efficiency : 100Lm/W
 Beam Angle : 110°
 CRI : ≥ 80
 Input Voltage : 170-400V

Cat. Code	Power(W)	Luminous Flux	Dimension
EB-9715	20W	2000Lm	220x162x38mm
EB-9716	30W	3000Lm	220x162x38mm
EB-9717	50W	5000Lm	280x185x50mm
EB-9718	100W	10000Lm	330x230x60mm
EB-9719	150W	15000Lm	390x265x70mm





LED FLOOD LIGHT - OUTDOOR

Model No.: EB-9729

LED POWER : 110W

Housing Material : Aluminium Die-Cast

Body Colour : Grey

Product Factor : ≥ 0.95

Working Temp. : -20°C to $+65^{\circ}\text{C}$

Colour Temp (K) : 3000K/6000K


Luminous Efficiency : 100Lm/W

Beam Angle : 35° / 80°

CRI : ≥ 80

Input Voltage : 180-240V

Dimension : 483x376x48mm



Model No.: EB-9730

LED POWER : 220W

Housing Material : Aluminium Die-Cast

Body Colour : Grey

Product Factor : ≥ 0.95

Working Temp. : -20°C to $+65^{\circ}\text{C}$

Colour Temp (K) : 3000K/6000K


Luminous Efficiency : 100Lm/W

Beam Angle : 35° / 80°

CRI : ≥ 80

Input Voltage : 180-240V


Dimension : 483x502x48mm






LED FLOOD LIGHT OUTDOOR

Housing Material : Aluminium Die-Cast
 Body Colour : Black
 Col. Temp.: 3000K / 6500K
 Product Factor : ≥ 0.95
 Working Temp. : -25°C to $+50^{\circ}\text{C}$
 Luminous Efficiency : 100Lm/W
 Beam Angle : 100°
 CRI : ≥ 80
 Input Voltage : 100-300V

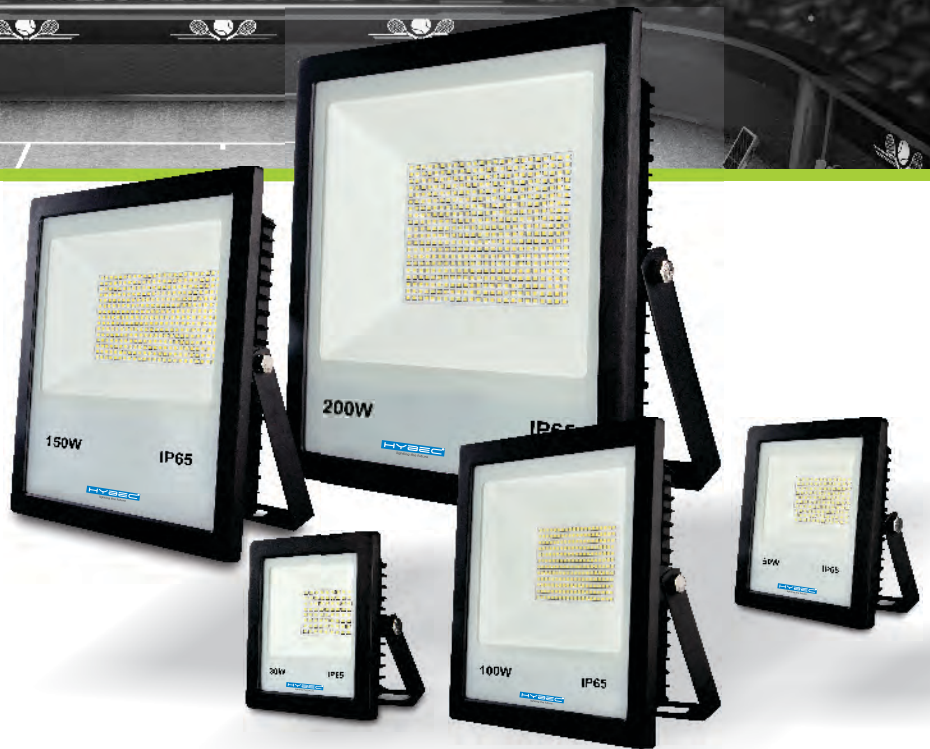

coming soon


Cat. Code	Power(W)	Luminous Flux	Dimension
EB-9771	10W	1000Lm	125x120x39mm
EB-9772	20W	2000Lm	154x144x46mm
EB-9773	30W	3000Lm	184x174x46mm
EB-9774	50W	5000Lm	244x234x60mm
EB-9775	100W	10000Lm	284x274x61mm
EB-9776	150W	15000Lm	314x304x76mm
EB-9777	200W	20000Lm	354x344x80mm





LED STREET LIGHT OUTDOOR

Housing Material : Aluminium Die-Cast
 Body Color : Siemens Grey
 Power Factor : 0.95
 Light Source : SMD
 Col. Temp.: 6500K
 C.R.I : >80
 Operating Temp. : -25°C to +50°C
 Beam Angle : 130° x 60°
 Input Voltage (V) : AC100-305V 50/60Hz




Cat. Code	Power(W)	Luminous Flux	Dimension
EB-9740	30W	3000Lm	370x175x50mm
EB-9741	60W	6000Lm	460x210x60mm
EB-9742	90W	9000Lm	540x265x70mm
EB-9743	120W	12000Lm	635x315x80mm





LED STREET LIGHT OUTDOOR

Housing Material : Aluminium Die-Cast
 Body Color : Grey
 Col. Temp.: 3000K / 6500K
 Power Factor : 0.95
 Luminous Flux : 100Lm/W
 C.R.I : >80
 Life Span : >35,000hrs
 Operating Temp. : -25°C to +50°C
 Beam Angle : 140° x 60°
 Input Voltage (V) : AC170-400V 50/60Hz



Cat. Code	Power(W)	Luminous Flux	Dimension
EB-9752	20W	2000Lm	93x58xH212mm
EB-9754	30W	3000Lm	109x58xH236mm
EB-9755	50W	5000Lm	127x58xH333mm
EB-9757	100W	10000Lm	168x58xH433mm






HIGH-BAY LIGHTS



LED HIGH-BAY LIGHT OUTDOOR



Housing Material : Aluminium Die-Cast
 Body Color : Black
 Col. Temp.: 3000K / 6500K
 Power Factor : 0.95
 Luminous Flux : 100Lm/W
 C.R.I : >80
 Life Span : >35,000hrs
 Operating Temp. : -25°C to +50°C
 Beam Angle : 60° / 90°
 Input Voltage (V) : AC100-300V 50/60Hz



Reflector for High-Bay

EB-REF 1 - (Suitable for 50W/100W)
 EB-REF 2 - (Suitable for 150W)
 EB-REF 3 - (Suitable for 200W)



Cat. Code	Power(W)	Luminous Flux	Dimension
EB-9760	50W	6000Lm	Ø320xH112mm
EB-9761	100W	12000Lm	Ø320xH112mm
EB-9762	150W	18000Lm	Ø360xH112mm
EB-9763	200W	24000Lm	Ø400xH118mm






LED SPIKE LIGHT - OUTDOOR




Model No.: EB-9881
LED POWER : 3W
 Housing Material : Aluminium Die-Cast
 Body Colour : Grey
 Light Source : CREE COB
 Colour Temp (K) : 3000K
 Beam Angle : 36°
 CRI : ≥80
 Input Voltage : 200-240V

Dimension : 67x45x50mm



LED SPIKE LIGHT - OUTDOOR

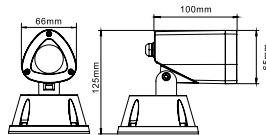

Model No.: EB-9884
LED POWER : 6W
 Housing Material : Aluminium Die-Cast
 Body Colour : Grey
 Light Source : CREE COB
 Colour Temp (K) : 3000K
 Beam Angle : 36°
 CRI : ≥80
 Input Voltage : 200-240V


Dimension : 100x66x125mm





LED SPIKE LIGHT OUTDOOR

Housing Material : Aluminium Die-Cast
 Body Colour : Grey
 Light Source : CREE COB
 Colour Temp (K) : 3000K
 Beam Angle : 36°
 CRI : ≥80
 Input Voltage : 200-240V



Cat. Code	Power(W)	Beam Angle	Dimension
EB-9882	3W	36°	67x45x212mm
EB-9885	6W	36°	100x66x239mm





SCAN THIS QR-CODE
TO LEARN MORE.



www.facebook.com/hybeclighting



www.twitter.com/hybeclighting



www.youtube.com/hybec-lighting
the future

Dealer / Distributor

ECO-BRITE *Series*

LED LIGHTS FOR EVERY HOME

- The company reserves the right to discard any non-moving products, which can be available on a bulk order request.
- Product dimensions and color may vary from that shown in the catalogue.
- Reference images for the product are imaginary and may not be shot at site.
- 1 & 2 years warranty on manufacturing defect of products, also depending on the category of product.
- Warranty is valid on LED light and LED driver only if purchased together.

www.hybec.net